



**SCHALUNGSBOHRER
BOARDING AUGER BIT
MÈCHE DE COFFRAGE**

0100

DE Ausführung: WS. Schaft zylindrisch. Alle Bohrer im Spezialverfahren hergestellt (nicht angelötet), daher bruchsicher und unempfindlich gegen stärkste Belastung. Kein Lösen des Bohrers vom Schaft, selbst bei härtestem Einsatz. Leicht nachschärfbar, robust und unverwüstlich.


Verwendung: Zur Herstellung von Schalungen in der Bauwirtschaft. Durchbohren von Holzdecken und Holzböden für Installation in der Altbauanierung. Drehzahl: 1000–2500 U/min.

EN Characteristics: Tool Steel; cylindrical shank. All bits are made in a special manufacturing method (not soldered), absolutely break-proof and insensible to the highest stress and strain. No loosening of the drills portion from the shank. Can be resharpened easily, robust and indestructible.

Usage: For producing of boardings in the construction economy. Drilling through wooden ceilings and wooden floors for installations when refurbishing old buildings. 1000–2500 RPM.

FR Caractéristiques: En acier, à queue cylindrique, de haute résistance à la cassure. Le passage conique du foret à la queue permet de sortir la mèche du trou sans efforts.

Utilisation: Perçage de coffrages et de bois creux. Pour travaux de rénovation, de chauffage, électriques et d'aménagements divers.
Vitesse de rotation: 1000-2500 t/min.

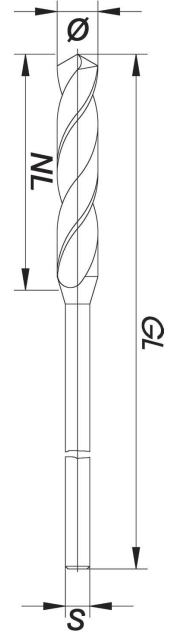


Ø	GL	NL	S	EAN	ART.NR.
6	400	57	5	9002696003113	0100060400
6	600	57	5	9002696003120	0100060600
8	400	75	6	9002696003137	0100080400
8	600	75	6	9002696003144	0100080600
8	800	75	6	9002696003151	0100080800
8	1000	75	6	9002696003168	0100081000
10	400	87	8	9002696003199	0100100400
10	600	87	8	9002696003205	0100100600
10	800	87	8	9002696003212	0100100800
12	400	100	8	9002696003236	0100120400
12	600	100	8	9002696003243	0100120600
12	800	100	8	9002696003250	0100120800
12	1000	100	8	9002696003267	0100121000
14	400	100	8	9002696003274	0100140400
14	600	100	8	9002696003281	0100140600
14	800	100	8	9002696003298	0100140800
14	1000	100	8	9002696003304	0100141000
16	400	100	10	9002696003311	0100160400
16	600	100	10	9002696003328	0100160600
16	800	100	10	9002696003335	0100160800
16	1000	100	10	9002696003342	0100161000
18	400	100	10	9002696003359	0100180400
18	600	100	10	9002696003366	0100180600
18	800	100	10	9002696003373	0100180800
18	1000	100	10	9002696003380	0100181000
20	400	100	10	9002696003397	0100200400
20	600	100	10	9002696003403	0100200600
20	800	100	10	9002696003410	0100200800
20	1000	100	10	9002696003427	0100201000
22	400	100	10	9002696003434	0100220400
22	600	100	10	9002696003441	0100220600
22	800	100	10	9002696003458	0100220800
22	1000	100	10	9002696003465	0100221000
24	400	100	11	9002696003472	0100240400
24	600	100	11	9002696003489	0100240600
24	800	100	11	9002696003496	0100240800
24	1000	100	11	9002696003502	0100241000
25	400	100	11	9002696067146	0100250400
25	600	100	11	9002696082620	0100250600



0100

SCHALUNGSBOHRER
BOARDING AUGER BIT
MÈCHE DE COFFRAGE

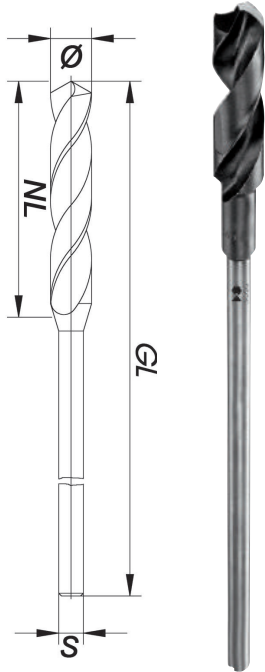

Ø	GL	NL	S	EAN	ART.NR.
26	400	100	11	9002696003519	0100260400
26	600	100	11	9002696003526	0100260600
26	800	100	11	9002696003533	0100260800
26	1000	100	11	9002696003540	0100261000
28	400	100	11	9002696003557	0100280400
28	600	100	11	9002696003564	0100280600
28	800	100	11	9002696003571	0100280800
28	1000	100	11	9002696003588	0100281000
30	400	100	11	9002696003595	0100300400
30	600	100	11	9002696003601	0100300600
30	800	100	11	9002696003618	0100300800
30	1000	100	11	9002696003625	0100301000
32	400	100	11	9002696067160	0100320400
32	600	100	11	9002696003632	0100320600
35	400	100	11	9002696067177	0100350400
35	600	100	11	9002696051046	0100350600
39	600	100	11	9002696051060	0100390600